

## SBTL3200 Series

**SBTL3200** Swing Barrier Turnstile with two barriers for additional Lane

**SBTL3211** Swing Barrier Turnstile with two barriers for additional Lane

(w/ controller and RFID reader)

**SBTL3222** Swing Barrier Turnstile with two barriers for additional Lane

(w/ controller and fingerprint & RFID reader)

The ZKTeco SBTL3200 swing barrier turnstile for additional lane is an elegant cost-effective entrance control system designed for high-traffic volume. The SBTL3200 series should work together with SBTL2000 series to build multiple lanes.

The SBTL3200 is a swing barrier turnstile for additional Lane series designed for smooth and silent operation and draws very little power. It's made of stainless steel which makes SBTL3200 highly durable.

SBTL3200 barriers are normally held in a locked position, thus denying access to the secured side. Upon SBTL3200's reader (RFID and/or fingerprint) positively recognizing a user's valid access card or fingerprint, its barriers swing automatically, thus allowing users passage to the secured side.

During emergencies the barriers automatically swing, thereby ensuring users FAST unencumbered exit to safety. During power outage, the user can push through the barrier easily to exit to safety.

SBTL3200 provides both security and convenient space, all in a very durable and elegant compact design.

### Features

#### Reliability

- SUS304 stainless steel casework ensure long-lasting durability.
- High quality electrical components Safety Features.
- Barriers swing automatically during emergencies.
- All smooth finish. No exposed screws.
- Ergonomic design makes card and fingerprint authentication fast & simple for users.

#### Built-in Reader Integration

- SBTL3200 series ships already integrated with our customers' preference for either card or fingerprint access control reader. This greatly reduces installation time & expense.
- SBTL3200 series and associated access control readers are all factory-tested prior to shipping.
- ZKTeco provides true plug & play turnstiles with the lowest possible total cost of ownership in the industry.


#### Simplification

- Simplify structure and connection, easy to maintain.
- LCD display screen shows the current running status, easy operation.

## Specifications

Power requirements		AC110V/220v,50/60HZ
Working temperature		-28℃~60℃
Working humidity		5%~80%
Working environment		Indoor/Outdoor
Speed of throughput	RFID	Maximum 30/ minute
	Fingerprint	Maximum 25/ minute
Lane width(mm)		1050
Footprint(mm*mm)		1250*1500
Dimensions(mm)		L=1500,W=260,H=1000
Dimension with packing(mm)		L=1640,W=400,H=1110
Net weight(kg)		66
Weight with packing(kg)		98
LED indicator		Y
Cabinet material		SUS304 Stainless Steel
Lid material		SUS304 Stainless Steel
Barrier material		SUS304 Stainless Steel
Barrier movement		Swing
Emergency mode		Y
Security level		Medium
MCBF		2 million

## Dimensions (mm)

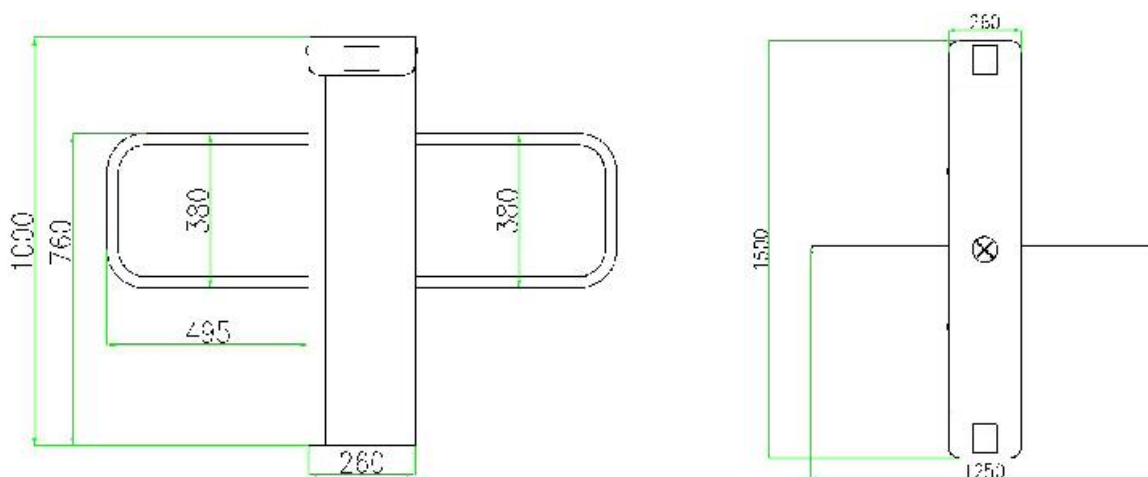

V1.1 2018.09.03

