

DS-7100HGHI-F1/N SERIES TURBO HD DVR



Features and Functions

Video Input and Transmission

- Connectable to HD-TVI, AHD and analog cameras
- Long distance transmission over twisted-pair cable & coax cable

Compression and Recording

- H.264+ compression improves encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at 720p resolution

Video Output

- HDMI / VGA output at up to 1920×720p resolution

Storage and Playback

- One SATA interface (up to 6TB of capacity per HDD)
- 4/8/16-ch synchronous playback at up to 720p resolution
- Smart search for efficient playback

Smart Function

- Supports VQD(Video Quality Diagnostics)

Network & Ethernet Access


- Hik-connect Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- One self-adaptive 10M/100Mbps network interface



Specifications

Model		DS-7104HGHI-F1/N	DS-7108HGHI-F1/N	DS-7116HGHI-F1/N
Video/Audio input	Video compression	H.264+/H.264		
	Analog video input	4-ch	8-ch	16-ch
		BNC interface (1.0Vp-p, 75 Ω), supporting coaxitron connection		
	Supported HD TVI input	720p/25Hz, 720p/30Hz		
	Supported AHD input	720p/25Hz, 720p/30Hz		
	CVBS input	Support		
	Audio compression	G.711u		
Audio input/Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)			
Video/Audio output	HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Encoding resolution	When 720p stream is connected: 720p/WD1/4CIF/VGA (12fps)/CIF		
		When 4CIF stream is connected: WD1/4CIF/VGA/CIF		
	Frame rate	25fps (P)/30fps (N)		
	Video bitrate	32 Kbps to 4 Mbps		
	Audio output	1-ch, RCA (Linear, 1KΩ)		
	Audio bitrate	64 Kbps		
	Dual-stream	Support		
	Stream type	Video, Video & Audio		
Synchronous playback	4-ch	8-ch	16-ch	
Network management	Remote connections	128		
	Network protocols	TCP/IP, PPPoE, DHCP, Hik-connect Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	SATA	1 SATA interface		
	Capacity	Up to 6TB capacity for each disk		
External interface	Network interface	1; RJ45 10M/100Mbps self-adaptive Ethernet interface		
	USB port	2 × USB 2.0		
General	Power supply	12 VDC		
	Consumption (without hard disks)	≤ 8W	≤ 12W	≤ 20W
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)		
	Working humidity	10% to 90%		
	Dimensions(W × D × H)	200 × 200 × 45mm (7.9 × 7.9 × 1.8 inch)		285 × 210 × 45 mm (11.2 × 8.3 × 1.8 inch)
Weight(without hard disks)	≤ 0.8 kg (1.8 lb)		≤ 1.2 kg (2.6 lb)	

Physical Interfaces

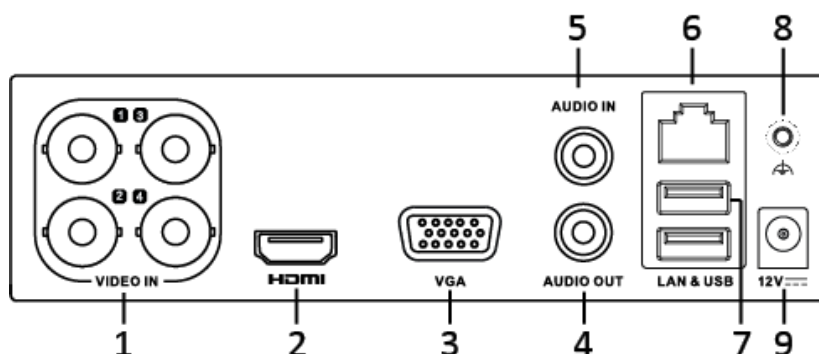

The rear panel of DS-7108HGHI-F1/N and DS-7116HGHI-F1/N provides 8 and 16 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	6	LAN Network Interface
2	HDMI Interface	7	USB Ports
3	VGA Interface	8	GND
4	AUDIO OUT, RCA Connector	9	12VDC Power Input
5	AUDIO IN, RCA Connector		

Available Models

DS-7104HGHI-F1/N, DS-7108HGHI-F1/N, DS-7116HGHI-F1/N.

Distributed by

ООО "Компания Строимир"

г. Киев, ул. Борщаговская 154А, оф. 435
 +38 (044) 331-15-43 info@smartel.ua
 www.smartel.ua

Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision Italy
 T +39-0438-6902
 info.it@hikvision.com

Hikvision Singapore
 T +65-6684-4718
 sg@hikvision.com

Hikvision Europe
 T +31-23-5542770
 saleseuro@hikvision.com

Hikvision France
 T +33(0)1-85-330-444
 info.fr@hikvision.com

Hikvision Oceania
 T +61-2-8599-4233
 salesau@hikvision.com

Hikvision Middle East
 T +971-4-8816086
 salesme@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
 info.es@hikvision.com

Hikvision Hong Kong
 T +852-2151-1761

Hikvision Russia
 T +7-495-669-67-99
 saleru@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
 poland@hikvision.com

Hikvision Canada
 T +1-909-895-0400
 sales.usa@hikvision.com

Hikvision India
 T +91-22-28469900
 sales@pramahikvision.com

Hikvision UK
 T +44-1628-9021-4
 support.uk@hikvision.com