

## DS-KH6100-E1 Network Indoor Station



The 4.3-inch series indoor station satisfies the demands of the entry level market and the intercom apartment market, which can provide flexible and convenient intercom functions, customized touch buttons functions, etc., while meeting the needs of customers with limited budgets.

- 4.3-inch colorful non-touch screen with resolution 480 × 272
- Standard PoE power supply without additional power adaptor
- Views live videos of door stations and linked cameras
- Convenient for users to customize functions according to their own usage habits by 4 custom touch buttons

## ▪ Specification

| System parameters                 |                                         |
|-----------------------------------|-----------------------------------------|
| Operating system                  | Linux                                   |
| ROM                               | 8 MB                                    |
| RAM                               | 64 MB                                   |
| CPU                               | Embedded processor                      |
| Display parameters                |                                         |
| Screen size                       | 4.3-inch                                |
| Operation method                  | 9 touch buttons                         |
| Type                              | Colorful TFT                            |
| Resolution                        | 480 × 272                               |
| Video parameters                  |                                         |
| Lens                              | /                                       |
| Resolution                        | /                                       |
| FOV                               | /                                       |
| WDR                               | /                                       |
| Video compression standard        | /                                       |
| Focal length                      | /                                       |
| Audio parameters                  |                                         |
| Audio compression standard        | G.711 U, G.711 A                        |
| Audio input                       | Built-in omnidirectional microphone     |
| Audio output                      | Built-in loudspeaker                    |
| Audio compression bitrate         | 64 Kbps                                 |
| Audio quality                     | Noise suppression and echo cancellation |
| Volume adjustment                 | Adjustable                              |
| Capacity                          |                                         |
| Event capacity                    | 200                                     |
| Notice capacity                   | 200                                     |
| Linked indoor extensions capacity | 16                                      |
| Network parameters                |                                         |
| Communication protocol            | TCP/IP, SIP, RTSP                       |
| Wi-Fi standard                    | /                                       |
| Bluetooth version                 | /                                       |
| 3G/4G standard                    | /                                       |
| Zigbee                            | /                                       |
| Device interfaces                 |                                         |
| Alarm input                       | /                                       |
| Network interface                 | 1 RJ-45 100 Mbps                        |
| RS-485                            | /                                       |
| USB                               | /                                       |
| TF card                           | /                                       |
| Alarm output                      | /                                       |



Hikvision  
No. 555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
Tel: 86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



| General                 |                                                                                                                                                                                                                                                                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Button                  | 9 touch buttons                                                                                                                                                                                                                                                                                                                     |
| Installation            | Wall mounting, table mounting                                                                                                                                                                                                                                                                                                       |
| Indicator               | 0                                                                                                                                                                                                                                                                                                                                   |
| Weight                  | With package: 330.6 g (0.7 lbs)<br>Without package: 191.8 g (0.4 lbs)                                                                                                                                                                                                                                                               |
| Protective level        | /                                                                                                                                                                                                                                                                                                                                   |
| Working temperature     | -10 °C to 50 °C (14 °F to 122 °F)                                                                                                                                                                                                                                                                                                   |
| Working humidity        | 10% to 90%                                                                                                                                                                                                                                                                                                                          |
| Dimensions              | 120 mm × 120 mm × 21 mm (4.7" × 4.7" × 0.83")                                                                                                                                                                                                                                                                                       |
| Application environment | Indoor                                                                                                                                                                                                                                                                                                                              |
| Power consumption       | ≤ 4 W                                                                                                                                                                                                                                                                                                                               |
| Language                | English, French, Portuguese, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian Danish, Slovenian, Slovak, Swedish, Finnish, Mongolian, Hebrew, Kazakh, Uzbek |
| Power supply            | IEEE802.3af, Standard PoE, 12 VDC                                                                                                                                                                                                                                                                                                   |

## ▪ Available Model

DS-KH6100-E1

### Headquarters


No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Dimension**

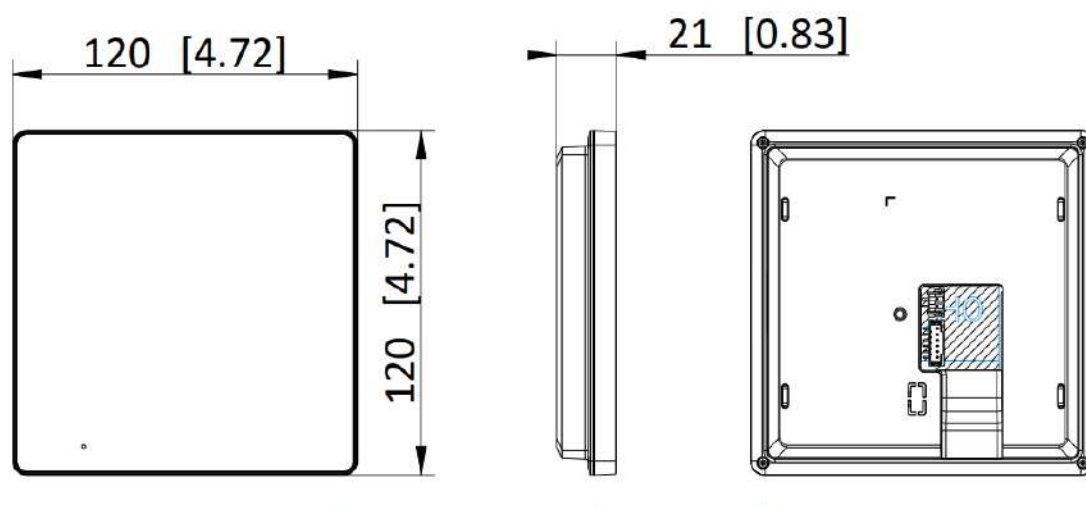

Unit:mm [inch]

|       |     |
|-------|-----|
| SCALE | 1:1 |
|-------|-----|

▪ **Accessory**

▪ **Optional**

**DS-KABH6350-T**  
**Table bracket**



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

