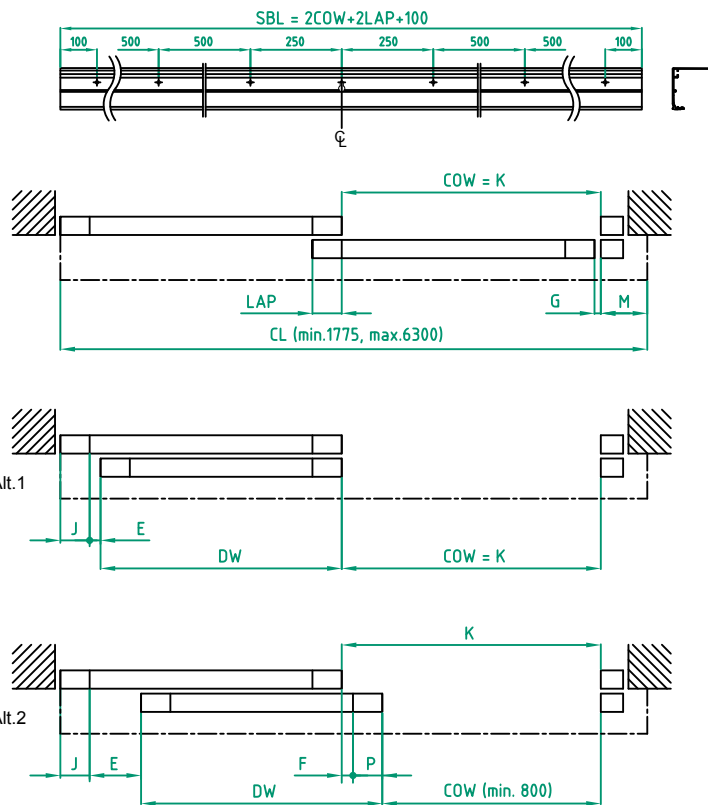
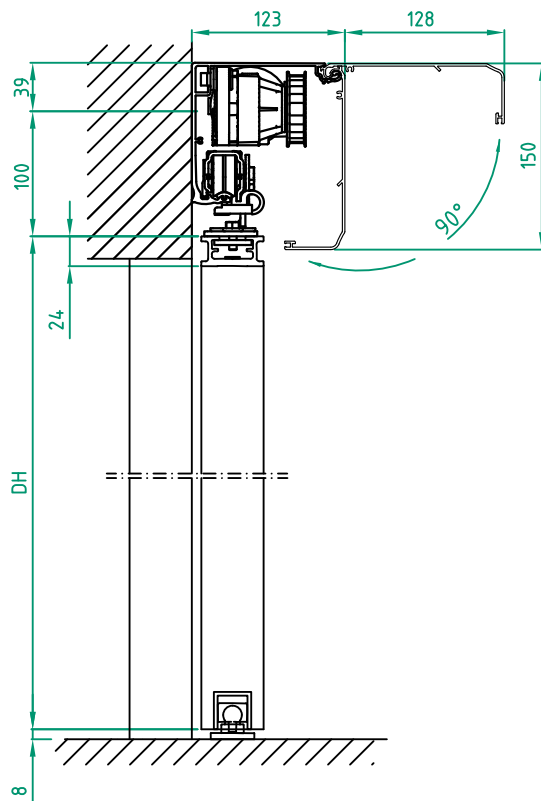


STATE WHEN ORDERING

COW = mm
CL = mm
SBL = mm
LAP = mm
G = mm
DW = mm
Door weight= kg

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

	Alt.1	Alt.2	
Overlap (min. 20mm)	LAP	LAP	
Finger protection (min. 25mm)	E	E	
Finger protection (min. 25mm)	-	F	
Jamb width (min. 30mm)	J	J	
Cover overlap (min. 100mm)	M	M	
Leading edge width	-	P	
Sum of above	Sum =.....		

Alt.1 COW = K K= K + LAP - G = DW DW =
Alt.2 COW + P + F = K K=

Cover length CL (CL - Sum) / 2 = = COW max.
Door travel COW (COW x2) + Sum = = CL min.

Customer:

Ref:

Door id:

Date:

Project No:




Sign:

Sliding door operator
ASSA ABLOY SL500-L
Art. No. 1008568

ASSA ABLOY

5.0

1010709-EI

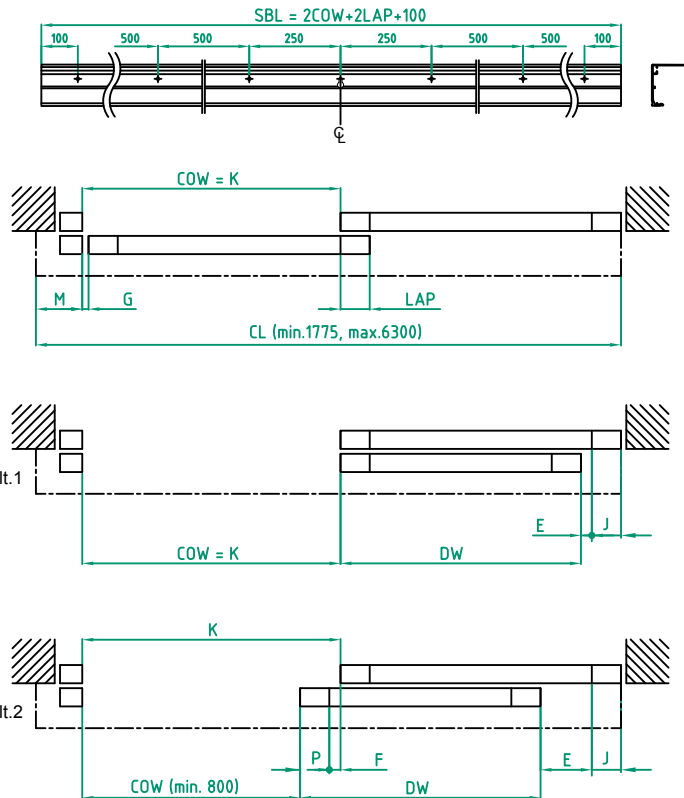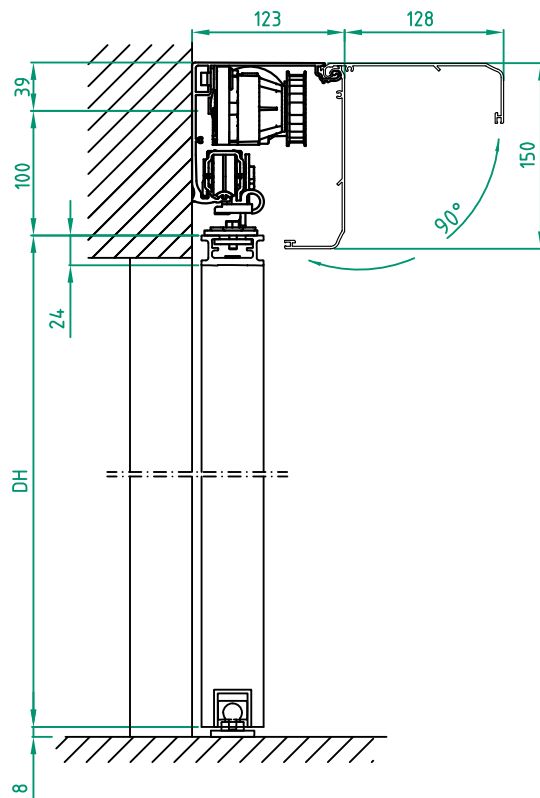

STATE WHEN ORDERING

COW = mm
 CL = mm
 SBL = mm
 LAP = mm
 G = mm
 DW = mm
 Door weight = kg

Surface treatment

☐ Silver anodized
 Special anodized
 RAL
 Special powder coating

	Alt.1	Alt.2	
Overlap (min. 20mm)	LAP	LAP	
Finger protection (min. 25mm)	E	E	
Finger protection (min. 25mm)	-	F	
Jamb width (min. 30mm)	J	J	
Cover overlap (min. 100mm)	M	M	
Leading edge width	-	P	
Sum of above	Sum =		

Alt.1 COW = K K = K + LAP - G = DW DW =
 Alt.2 COW + P + F = K K =

Cover length CL (CL - Sum) / 2 = = COW max.
 Door travel COW (COW x2) + Sum = = CL min.

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Sliding door operator
 ASSA ABLOY SL500-R
 Art. No. 1008568

ASSA ABLOY

5.0

1010709-EI