


# F18

## Fingerprint Standalone Access Control



F18 is an innovative biometric fingerprint reader for access control application. With high-performance firmware functions and compact design, it has become one of ZKTeco's most popular devices. It is applied with ZKTeco's latest firmware with user-friendly UI and flexible user privilege settings for multi-level management. The new hardware platform uses ZMM210 core-board with 1.2Ghz CPU. With optimization of both hardware platform and firmware, the new f18 is able to verify fingerprints with even higher efficiency. The device offers flexibility of both standalone installation and installation with any third-party access control panels which support standard Wiegand signal. TCP/IP and RS485 are also available which enable F18 to be applied in different network.

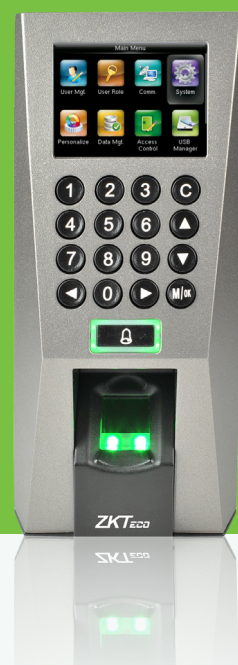

### TFT Color Screen

- Audio-visual indication for acceptance and rejection of valid/invalid fingerprints
- More simple and convenient operation



### Slim and Elegant Design

- Streamlined and slim design for narrow spaces



### New Platform

- ZMM210 hardware with 1.2GHz CPU further speeds up processing time



### Easy Installation and Connectivity

- Wiegand input & output
- Network interface by TCP/IP or RS485



### Full Access Control Features

- Webserver
- Anti-passback
- Access control interface for 3rd party electric lock, door sensor, exit button, alarm and doorbell



### New Firmware

- Adopts new firmware which optimizes various functions and supports flexible user privilege setting for multi-level management

# Specifications

Display	2.4-inch TFT LCD Color Screen
Fingerprint Capacity	3000
Card Capacity	5000(Optional) ID /Mifare/HID card
Transaction Capacity	30,000
Sensor	ZK Optical Sensor
Algorithm Version	ZK Finger V9.0&10.0
Communication	RS232/485, TCP/IP, USB-host
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm, Doorbell
Wiegand Signal	Input, Output,SRB
Functions	DST, Record Query, Anti-passback, External RS485 fingerprint reader, Printer(Optional)
Power Supply	12V DC, 3A
Operating Temperature	0 °C- 45 °C
Operating Humidity	20%-80%
SDK and Software	Standalone SDK,ZKAccess3.5 software
Dimension(WxDxH)	80×183×42mm

## Optional Accessories



FR1200



RFID Reader



Exit Button



Electric Lock




Alarm




Sensor

## Configuration

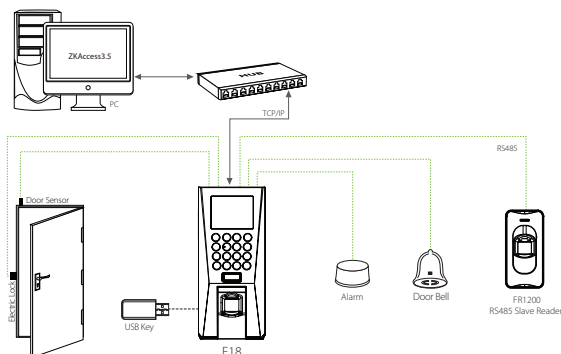

## Dimensions (mm)

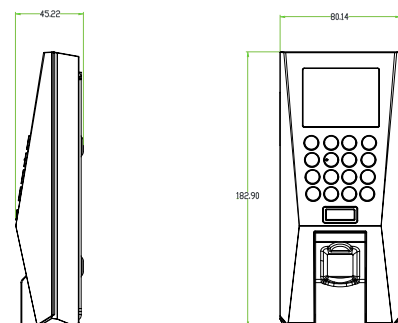

**ООО Компания "Строимир"**  
г. Киев, ул. Борщаговская 154А, оф. 435  
+38 (044) 331-15-43 info@smartel.ua  
<https://smartel.ua>

© Copyright 2016. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.



<https://smartel.ua>