

DH-HAT200-N2

Window Intercom



Features

- Hi-fidelity full duplex intercom;
- Support master and slave volume adjustment, and can one click mute;
- Single channel analog mixing audio out;
- G.711A, G.711U, PCM, ACC multiple encoding types;
- 30fps@1080P wide dynamic range real-time video;
- Face detection, search and playback via NVR and web client;
- Hot plugging, automatic state detection, and abnormal voice prompt;
- The metal fuselage, full touch buttons.


Technical Specifications

Model		DH-HAT200-N2
Intercom	Intercom	Full duplex intercom, half-duplex intercom
	Mix output	1 channel
	WDR	Yes
	Loudspeaker impedance of the master device	8Ω, 2W
	Output speaker power of the slave device	4Ω, 5W
	Master microphone	-45dB
	Slave microphone	-38dB
	Sampling rate	16kHz
	Web intercom	Yes
System	Main processor	Industrial embedded microprocessor
	Operating system	Embedded LINUX operating system
Video parameter	Image coding standard	H.264/H.264H/H.264B
	Code resolution	1080P@25fps/1080N/720P/960H/D1/HD1/2CIF/CIF/QCIF
	Video frame rate	1~25fps/s
	Video bitrate	32kbps~6144kbps(1080P: 4Mbps, max. 6Mbps)
	Bitstream type	Composite flow of audio and video
Audio parameter	Coding standard	G.711A, G.711U, PCM, AAC
	Sampling rate of audio	16kHz
Video management	Video mode	Video recording, alarm recording, timing recording.
	Playback mode	Web supports video playback
	Backup mode	Support web video and picture backup
Storage	SD card	Support 1 SD card slot
Port information	Port of the slave device	1, connect with the slave device
	Mix output	1, microphone mixing of the master and slave devices
	MIC	1, support 3.5mm headset access
	Micro SD	1, support 1*SD card access, to storage video and pictures
	Net	1*RJ45 port, 100M Base-T, to transmit network data
	Power port	1, input DC12V
	USB A/B	1
General	Power Supply	DC12V
	Power consumption	6W (without SD card)
	Working temperature	-10°C~+55°C(14°F~+131°F)
	Working humidity	10%~90%
	Dimension of the master device	177mmx113mmx36.3mm(6.97"x4.45"x1.43")
	Dimension of the slave device	Φ72mmx24mm(2.83"x0.94")
	Material	Aluminum&PMMA

Audio Series | DH-HAT200-N2

	Color	Black, silvery
	Weight	0.75kg(1.65lb)
	Language standard	Support 11 languages, PN system
	Network protocol	TCP/IP, private, ONVIF, RTSP
	Carried standards	Conform to GA38 standard

Dimensions (mm/inch)

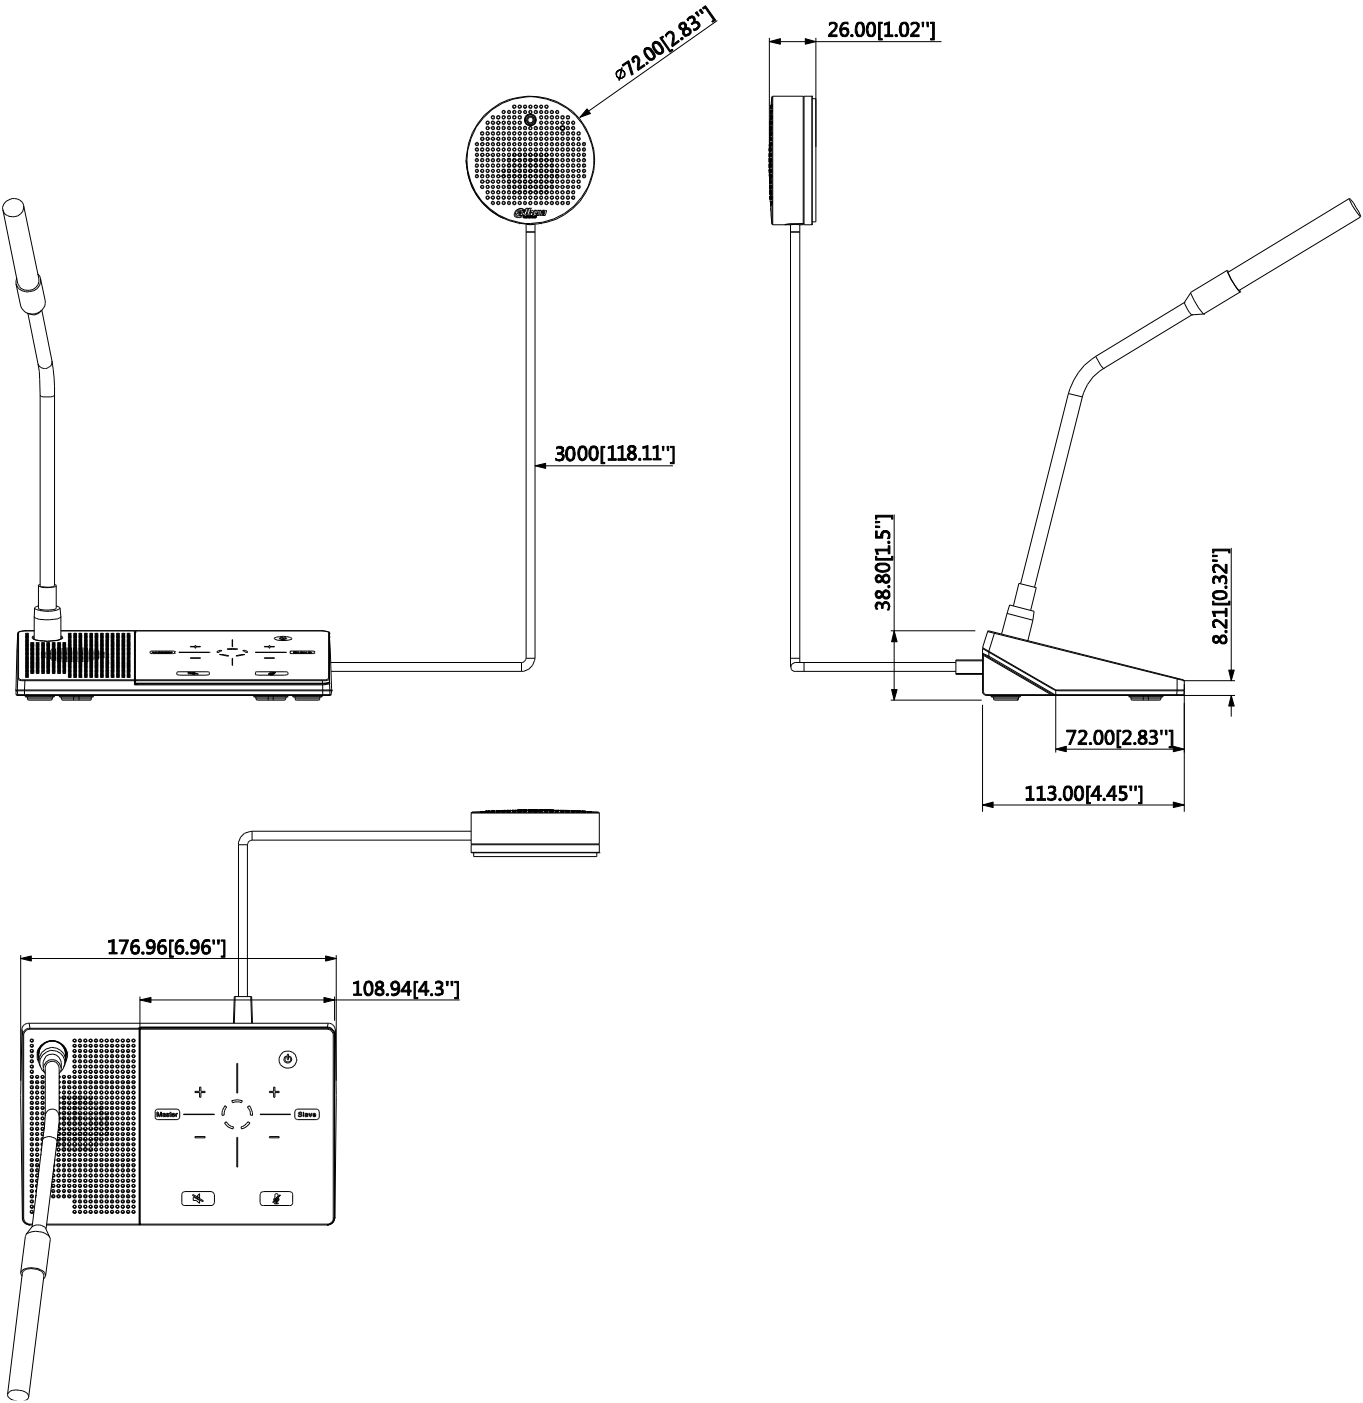

Product Detail



Package Information

- The master device of window intercom *1
- The slave device of window intercom with 3m pigtail *1
- Microphone *1
- 2m UTP CAT5E network cable *1
- DC12V2A power adapter *1
- 3M glue *1
- CD *1
- User's manual *1