

FR1500-WP

Flush-Mounted RS-485 Fingerprint Reader



Features

- Single gang Standard junction box installation.
- Flush-Mounted Design for neat installation.
- RS-485 Communication Interface.
- BioID Fingerprint Sensor; SilkID Fingerprint Sensor (Optional).
- Stainless Steel Front casing.
- Fingerprint Protective Cover.
- IP65 Waterproof

Specifications

Additional Info

Working Temperature: -10 °C ~ 45 °C
Working Humidity: 20 ~ 95%
Dimensions(LxWxH): 121.3 × 77.3 × 38 mm
Algorithm: ZKBioFinger v10.0

Power Supply

Operating Voltage 12V DC
Stand-by Mode Power Consumption: 12V*60mA=0.72W
Peak Current of Fingerprint scanning: 140mA

Hardware

1.0 GHz CPU
ZKBioID Sensor
Buzzer Prompt
Three-color Indicator Light

Standard Features

125KHz RFID Card

Communication

RS485


Compatibility

inBio/inBioPro Controllers
Standalone Fingerprint Devices


Optional Features

125KHz HID Prox Card
13.56MHz MifareCard(S50 / S70)
13.56MHz HID Iclass Card

Configuration

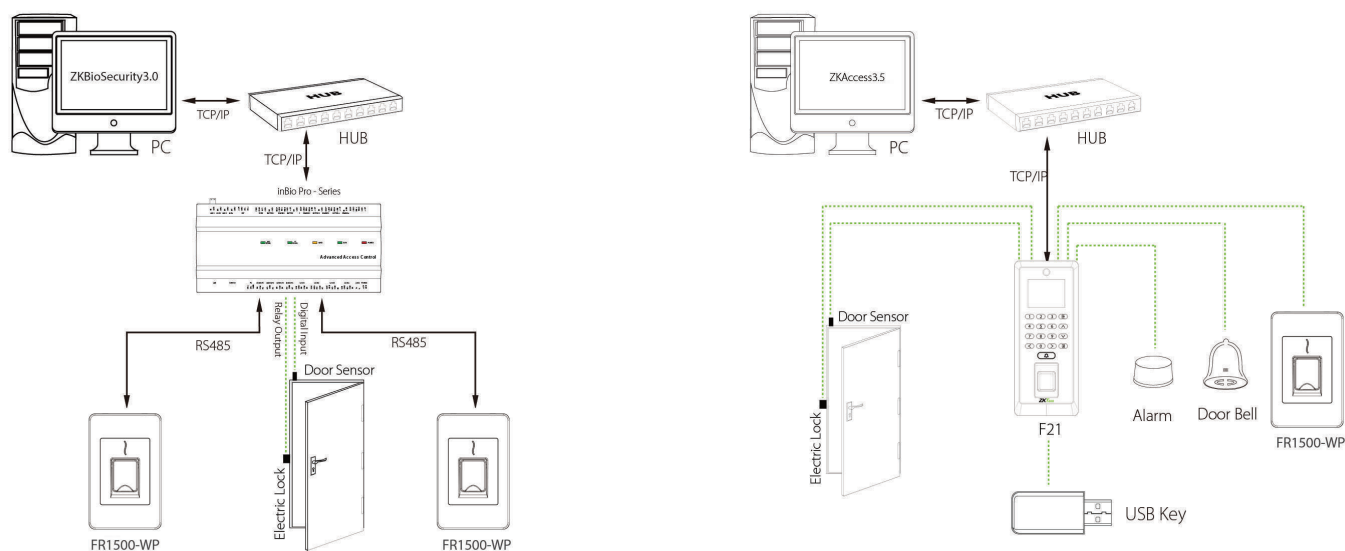

Dimensions (mm)

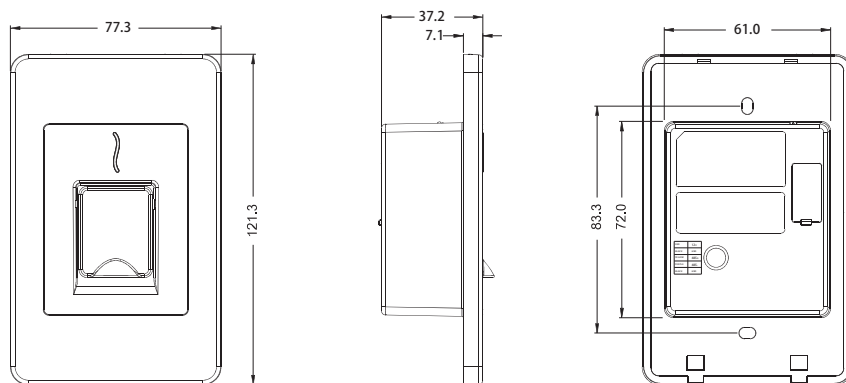

© Copyright 2017, ZKTeco CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.



ООО Компания "Строймир"
г. Киев, ул. Борщаговская 154А, оф. 435
+38 (044) 331-15-43 info@smartel.ua
<https://smartel.ua>

<https://smartel.ua>

СТРОЙМИР®
МИРНАЯ КОМПАНИЯ