

Product Datasheet

10-port Gigabit Uplink PoE Switch

(ONV-H1108PGL)



OVERVIEW

The ONV-H1108PGL is a 10/100Mbps unmanaged PoE switch independently developed by ONV. It has 8*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports. Port 1-8 can support PoE+ standard, and single-port PoE power up to 30W. As a PoE power supply device, it can automatically detect and recognize the power-receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, IP cameras, VoIP phones, video access control intercoms, etc. through a network cable to meet the network environment that needs a high-density PoE power supply. It is suitable for hotels, campuses, factory quarters, and small and medium-sized enterprises to form an economy-efficient network. Unmanaged mode, plug and play, no configuration, easy to use.

FEATURE

■ 10/100M access, Gigabit dual RJ45 port uplink

- ◇ Support non-blocking wire-speed forwarding for smoother transmission.
- ◇ Support IEEE802.3x full-duplex flow control and Backpressure half-duplex flow control.

- ◇ Provides 8*10/100Base-TX RJ45 ports and 2*10/100/1000Base-T RJ45 ports for flexible networking and meets the networking requirements of various scenarios.

■ **Smart PoE power supply**

- ◇ Comply with IEEE 802.3 af/at PoE standard, automatically identify PoE devices for power supply, and not damage non-PoE devices.
- ◇ 8*10/100Base-TX PoE ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

■ **Innovative function**

- ◇ **Long distance mode(250m):** When opening, the speed of port 1-8 is reduced to 10M. With the existing twisted pair cable, the transmission limit of the twisted pair line can be broken, and the transmission distance can reach 250 meters, on the other hand, It can solve the problem of poor transmission caused by line aging.

■ **Stable and reliable, easy to use**


- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link/Act, and PoE.
- ◇ Self-developed power supply, high redundancy design, providing a long-term and stable PoE power output.
- ◇ Low power consumption, galvanized steel casing, no fan, and excellent heat dissipation ensure the stable operation of the switch.

TECHNICAL SPECIFICATION


Model	ONV-H1108PGL
Interface Characteristics	
Fixed Port	8*10/100Base-TX PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data)
Ethernet Port	Port 1-8 can support 10/100Base-TX and port 9-10 can support 10/100/1000Base-T auto-sensing, full/ half duplex MDI/ MDI-X self-adaption
Functional Switch	250m: Port 1-8 can support 10M/250 meters transmission when the functional switch is on 250m. Note: When the switch status changes, the PoE switch must be restarted for the function switch to take effect.
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤250 meters) 100BASE-TX: Cat5 or later UTP (≤100 meters) 1000BASE-T: Cat5e or later UTP (≤100 meters)
Chip Parameter	
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3x
Forwarding Mode	Store and Forward (Full Wire Speed)
Switching Capacity	11.8Gbps (Non-blocking)
Forwarding Rate@64byte	4.17Mpps
MAC	3k
Buffer Memory	2M
LED Indicator	Power: PWR (Green), Network: Link (Yellow) PoE: PoE (Green), Functional switch: 100m/250m (Green)
PoE & Power Supply	
PoE Port	Port 1-8
Power Supply Pin	1/2(+) 3/6(-)

Max Power Per Port	30W, PoE+
Total PWR / Input Voltage	120W/ (AC100-240V)
Power Consumption	Standby<5W, Full load<120W
Power Supply	Built-in power supply, AC100~240V 50-60Hz, 2.2A
Physical Parameter	
Operation TEMP/ Humidity	-20~+55°C, 5%~90% RH Non condensing
Storage TEMP/ Humidity	-40~+75°C, 5%~95% RH Non condensing
Dimension	195*130*40mm
Net /Gross Weight	0.75kg / 1.0kg
Installation	Desktop, Wall mounted
Certification & Warranty	
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS
Warranty	1 year, lifelong maintenance.

DIMENSION

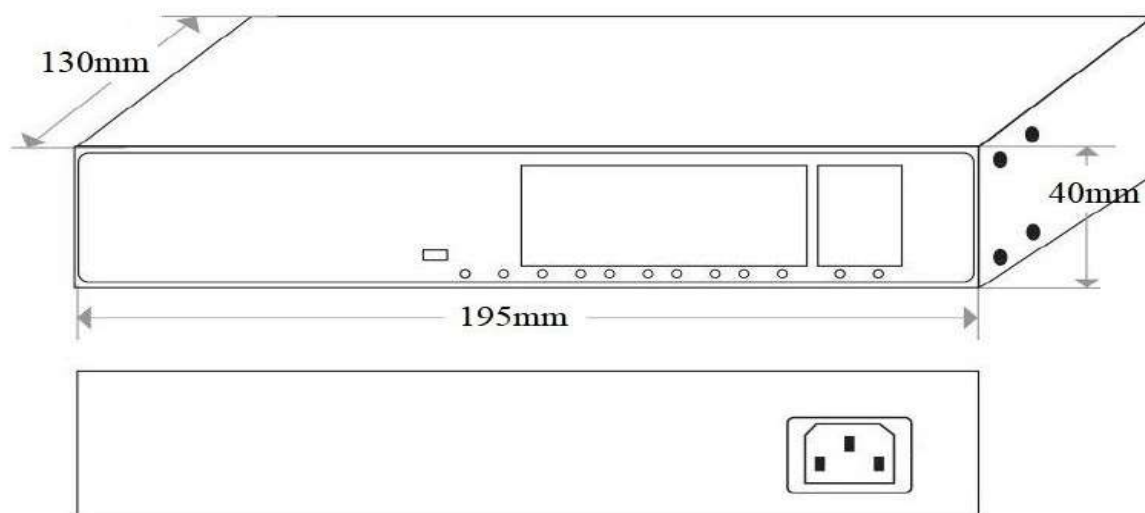

APPLICATION

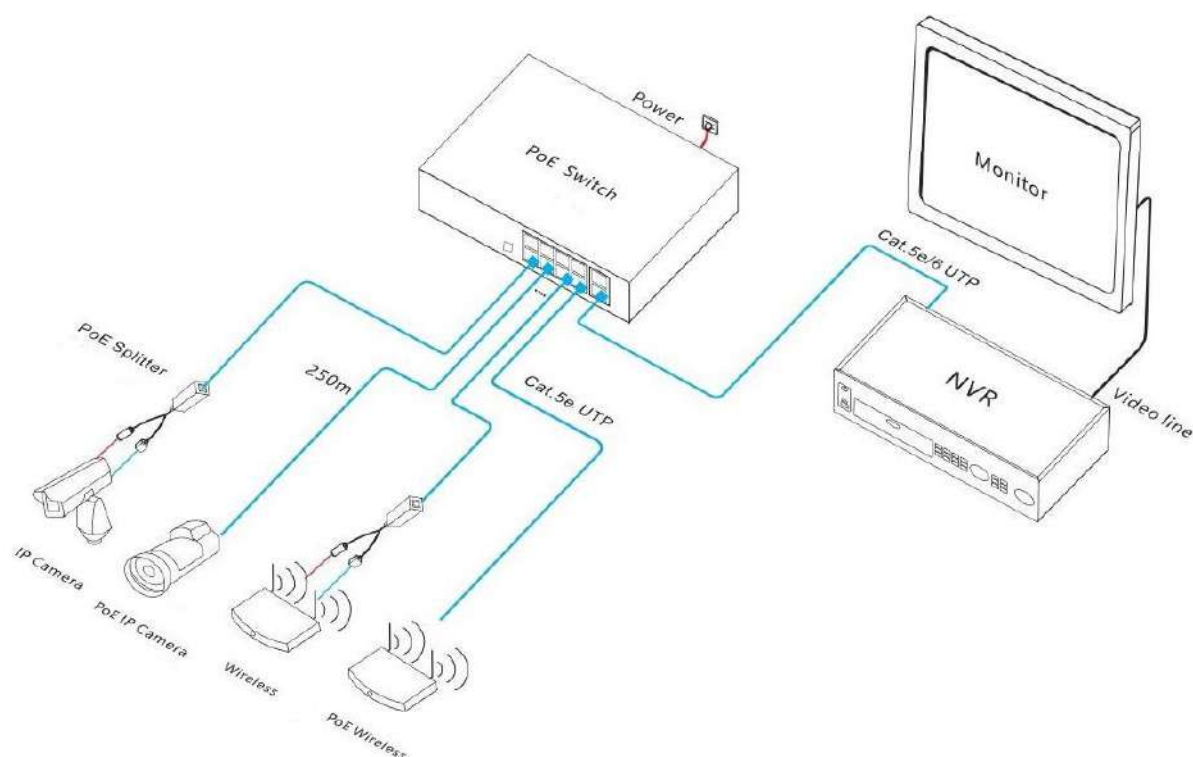

ORDERING INFORMATION

Model	Description	Built-in Power Supply
ONV-H1108PGL	Unmanaged PoE switch with 8*10/100M RJ45 ports and 2*10/100/1000M uplink RJ45 ports. Port 1-8 can support PoE+ standard. Port 1-8 can support 10M/250 meters transmission when the functional switch is on 250m, and built-in power supply.	120W

PACKING LIST

Packing List	Content	Qty	Unit
	10-port gigabit uplink PoE switch	1	SET
	AC Power Line	1	PC
	User Guide	1	PC
	Warranty Card	1	PC

CONTACT US



Optical Network Video Technologies (Shenzhen) Co., Ltd.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: ONV-PoE-IoT

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen

Factory Address: The 4-6th Floor, No. 59, Huaning Road, Xinwei Community, Dalang Street,
Longhua District, Shenzhen

